



HENGEL
EQUIPMENTS

Food products in right hands

DATA SHEET

Freezer- preserver with doors - Single depth



TEMPERATURE

-35° / -16°


Technical specifications



DATA SHEET Technical specifications

CS70 - Freezerpreserver / single depth / 8 doors

Configuration

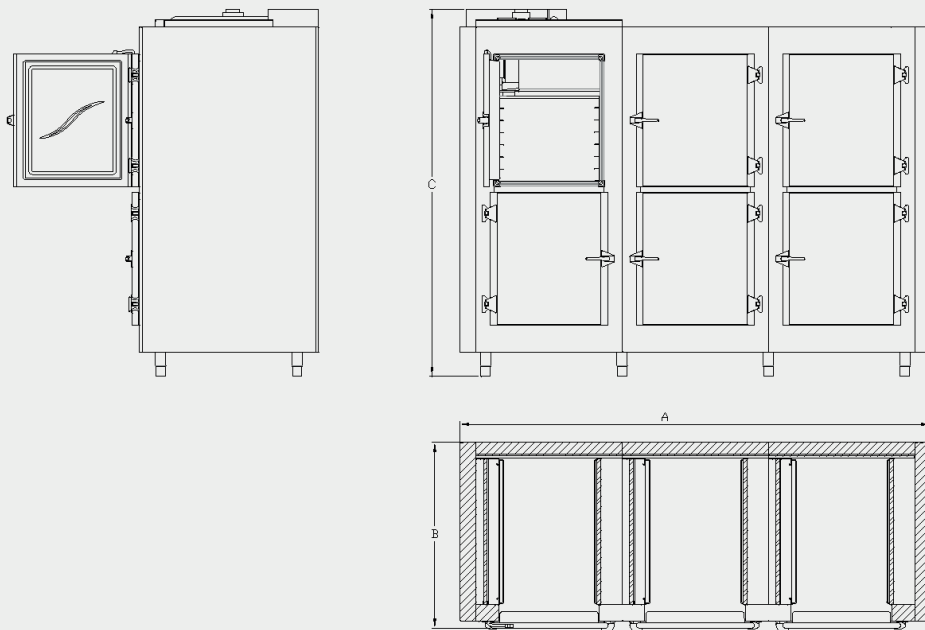

CHAPTER	DESIGNATION	CS70
DIMENSION	A - EXTERNAL WIDTH (MM)	2860
	B - EXTERNAL DEPTH (MM)	950
	C - EXTERNAL HEIGHT (MM)	2250
	NUMBER OF DOORS	8
	GROSS WEIGHT (KG)	617



DATA SHEET Technical specifications

CS70 - Freezerpreserver / single depth / 8 doors

CHAPTER	DESIGNATION	CS70
GENERAL CHARACTERISTICS	CONSTRUCTION	Int. / Ext. white lacquered - option Int. / Ext. stainless steel
	INSULATION	Polyurethane foam insulation 43 kg/m ³ , thickness 100mm
	DOOR	2 doors on the left / remaining doors on the right
	DOOR GASKET	Heating cord
	LEGS/WHEEL	Legs/wheel
CAPACITÉ CAPACITY	NUMBER OF TRAYS	7
	SIZE TRAYS	400x600
REFRIGERATION CHARACTERISTICS	CONTROL INTERFACE	Bi-Tronic Slide
	PRESSURE REGULATOR	Thermostatic
	DEFROSTING	Programmable by electric resistance
	UNIT TYPE	GN6T
	COOLING POWER*	1,545 Kw
	REFRIGERANT	R452A
	OPTIMUM OPERATING TEMPERATURE	32
	MAXIMUM OPERATING TEMPERATURE	40
ELECTRICAL CHARACTERISTICS OF THE TUNNEL	ELECTRICAL POWER (W)	2650W
	VOLTAGE	400 V -3~ +N+E
	ELECTRICAL FREQUENCY	50 Hz
DELIVERY	DELIVERY	Disassembled, pre-assembled

* Power in KW at -30°C (Evap. T°C) and 32°C (Ext. T°C)