



07/2013

Mod: T025/A1

Production code: TG250B



Diamond
catering equipment

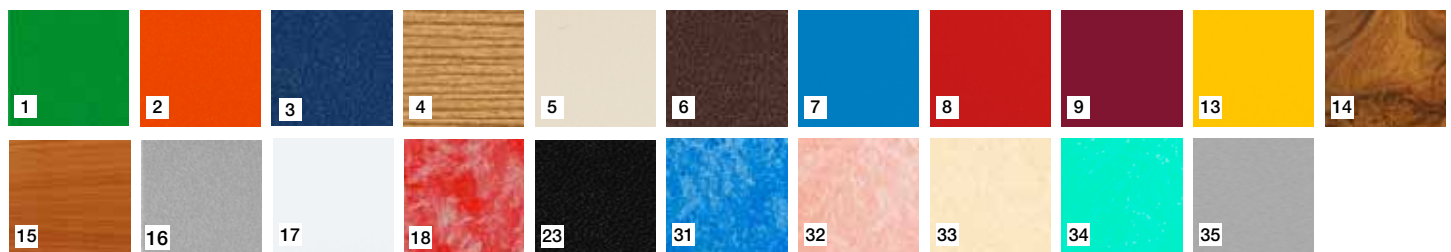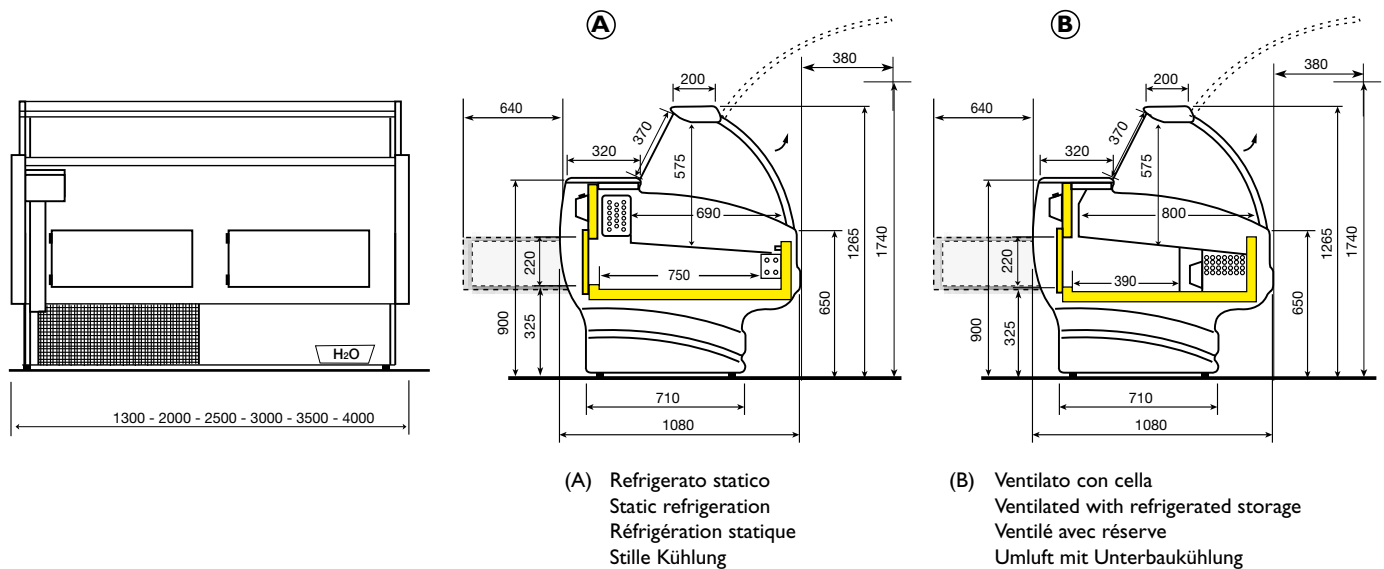

DATI TECNICI - TECHNICAL DATA - DONNES TECHNIQUES - TECHNISCHE DATEN

	Lunghezza con spalle Length including ends Longueur avec joues Länge mit Seitenteilen mm.	Temperatura di esercizio Working temperature Temp. de fonctionnement Betriebstemperatur	Tensione di alimentazione Supply voltage Tension d'alimentation Speisespannung	Potenza frigorifera Refrigeration power Puissance frigorifique Kälteleistung Watt (-10°C)	Illuminazione Lighting power Eclairage Beleuchtung Watt	Superficie espositiva Display surface Surface d'exposition Auslagefläche m2	Capacità cella Storage capacity Capacité réserve Zellenkapazität Lt.	Sportelli Doors Portes Türen nr.
A Statico Static refrigeration Réfrigération statique Stille Kühlung	1300	25° C u.r. 60% 4°/+6° C	230 V 50 Hz	492	1 x 30	0,84	200	1
	2000			721	2 x 18	1,32	327	2
	2500			934	2 x 30	1,67	414	3
	3000			1173	3 x 18	2,01	500	3
	3500			1294	3 x 30	2,36	586	4
	4000			1723	4 x 18	2,70	654	4
B Ventilato con cella Ventilated with storage Ventilé avec réserve Umluft mit Unterbaukühlung	1300	25° C u.r. 60% 0°/+2° C	230 V 50 Hz	721	1 x 30	0,98	109	1
	2000			1173	2 x 18	1,54	174	2
	2500			1294	2 x 30	1,94	220	3
	3000			2064	3 x 18	2,34	266	3
	3500			2027	3 x 30	2,74	312	4
	4000			2027	4 x 18	3,14	358	4

I dati delle unità refrigeranti si riferiscono alla versione gruppo incorporato 230V/1/50Hz R404a
The details of the refrigerating units are referred to cabinets with built-in unit in 230V/1/50Hz R404a

Les données des groupes réfrigérants sont pour vitrines avec groupe logé 230V/1/50Hz R404a
Die technischen Daten der Kühlmaschinen beziehen sich auf Vitrinen mit eingebautem Aggregat 230V/1/50Hz R404a



NON CONTIENE C.F.C.
DOES NOT CONTAIN C.F.C.
NE CONTIENT PAS DE C.F.C.
ENTHÄLT KEIN C.F.C.